

ZX5 PRODUCT FEATURES

- 5x magnification for maximum flexibility and precision
- Large field of view for quick aiming and easy target acquisition
- Special optical high-tech glass provides excellent image quality and outstanding light transmission
- Perfect sharpness and clarity even in difficult light situations
- Infinitely variable reticle illumination for quick and precise aiming to allow full concentration on the target by day or by night*
- Position sensor automatically deactivates the illumination, or after 2 hours*
- Reticle at the 2nd focal plane
- Greater safety with an eye relief of 10 cm
- M* multi-coating on all optical components for excellent light transmission, contrast and colour rendition even in low light situations
- Precise elevation and windage adjustments at 1/4 MOA per click
- Parallax compensation (SF models)
- Solid, extremely scratch and shock-resistant aviation aluminium housing
- 30 mm tube
- Comfortable and smooth variable power adjustment
- Quick adjusting ocular
- Filled with high grade Argon gas for optimal protection and durability of the interior elements
- Waterproof and fog free internal lenses

TECHNICAL DATA

| ZX5/ZX5i | 1-5x24 | 2-10x50 | 3-15x56 SF | 5-25x56 SF |
|--|-------------------------------|--|--|--|
| Magnification | 1 - 5 x | 2 - 10x | 3 - 15 x | 5 - 25 x |
| Objective diameter (mm) | 24 | 50 | 56 | 56 |
| Exit pupil diameter low/high (mm) | 11.4 / 4.8 | 11.4 / 5.0 | 11.4 / 3.7 | 11.2 / 2.2 |
| Field of view / mtrs at 100 mtrs | 37.1 / 8.2 | 18.9 / 4.0 | 11.9 / 2.6 | 7.2 / 1.6 |
| Eye relief (mm) | - 100 | - 100 | - 100 | - 100 |
| Diopter adjustment range | -3.0 / +2.5 | -3.0 / +2.5 | -3.0 / +2.5 | -3.0 / +2.5 |
| Elevation and windage adjustment (per click) | 1/4 MOA (7.5 mm at 100 m) | 1/4 MOA (7.5 mm at 100 m) | 1/4 MOA (7.5 mm at 100 m) | 1/8 MOA (3.7 mm at 100 m) |
| Reticle adjustment range (elevation and windage) | +/- 38 MOA | +/- 38 MOA | +/- 20 MOA | +/- 13 MOA |
| Focal plane | 2 | 2 | 2 | 2 |
| Power supply for the illuminated reticle* | Battery CR 2032 | Battery CR 2032 | Battery CR 2032 | Battery CR 2032 |
| Argon filling | Yes | Yes | Yes | Yes |
| Main tube diameter (mm) | 30 | 30 | 30 | 30 |
| Overall length (mm) | 285 | 335 | 372 | 430 |
| Weight (g) | 470 | 640 | 750 | 835 |
| Order number | 66605 (PLEX) 66606* (PLEX) | 66607 (BDC) 66608 (PLEX) 66609* (BDC) 66610* (PLEX) | 66611 (BDC) 66612 (PLEX) 66613* (BDC) 66614* (PLEX) | 66615 (BDC) 66617 (PLEX) 66618* (BDC) 66619* (PLEX) |

*ZX5i



MINOX

ZX5 LINE

German. Performance. Optics.

ZX5 RIFLESCOPES



ZX5 1-5x24



ZX5 2-10x50



ZX5 3-15x56 SF



ZX5 5-25x56 SF



MINOX COMFORT SERVICE

OUR QUALITY PROMISE FOR THE NEXT 30 YEARS

More assurance and service for your MINOX ZX5 rifle scope even after the statutory warranty has expired: After the product registration MINOX customers take advantage of the MINOX Comfort Service. This service will be offered to MINOX customers for 30 years after the date of purchase.

*ZX5i

MINOX GmbH · Walter-Zapp-Str. 4 · 35578 Wetzlar
Tel. +49 (0)64 41 / 917-0 · Fax +49 (0)64 41 / 917-612
E-Mail: info@minox.com · www.minox.com
www.minox.com/facebook · www.youtube.com/minoxwebcasts

MINOX

German. Performance. Optics.

www.minox.com

All four models are available as ZX5i with illuminated reticles.

Specifications, features, supply, prices and design are subject to change. · © 2015 MINOX GmbH · Order number: 99944 10/15/FX/50P

CONVINCING PERFORMANCE.

MINOX ZX5i

FLEXIBLE AND PRECISE.

RETICLES

The new MINOX ZX5 riflescope line with 5x magnification

MINOX has yet again set new standards in precision, quality and reliability with its powerful riflescope models in the ZX5 product line. The 5x magnification and the 30 mm riflescope tube offer the user maximum flexibility and precision for short and long-range shooting distances.

Optionally available with and without illuminated reticle, these new ZX5 riflescopes are suitable for hunting even in deep twilight conditions and enable the user to concentrate faster on the target as well as reliably gain an overview for that decisive moment. The large field of view enables quick aiming and a reliable target acquisition.

A smooth power adjustment and an easy-to-adjust rubber-armored eyepiece enable quick focusing on the subject in view. The extended eye relief of 100 mm is extremely beneficial to users wearing eyeglasses and when using larger calibers.

The inner components of the ZX5 Line models are protected by an exceptionally shock-resistant body made of special anodized aluminium that is commonly used in general aviation applications. Purged with argon gas, fogging and corrosion on the inside of the riflescope is effectively prevented.

M* multi-coating on all optical components for excellent light transmission

Extremely shock-resistant aluminium housing

30 mm tube

Automatic deactivation of the reticle illumination

Reticle at the 2nd focal plane

Large field of view




Flexible: The proven 5x magnification




Precise: Elevation and windage adjustments at 1/4 MOA per click and parallax compensation (SF models)


For hunting in twilight or in poor light conditions, the new ZX5i scopes are optionally available with an infinitely adjustable illuminated reticle that automatically switches off via position sensor* or after 2 hours.

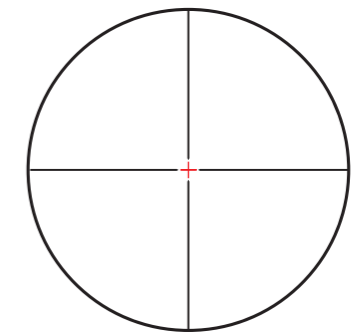


PLEX illuminated



PLEX

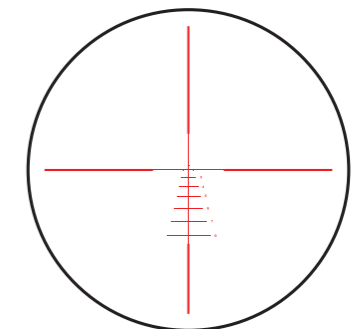

BDC illuminated



BDC

*Position sensor: Deactivation at > 45° (laying the weapon on its side) and vertical angle of > 75° (standing the weapon in a vertical position). The illumination will be automatically activated when taking up the weapon again within 2 hours after the reticle illumination has been turned on.